



SEMI TRACTION
UTILITY, SOLAR & MARINE

95751 - 12V 75 Ah (C₂₀)



PHYSICAL CHARACTERISTICS

	SI Units	US Units
Length	278 mm	11 inch
Width	175 mm	6.9 inch
Height	190 mm	7.5 inch
Typical weight	18.6 kg	41.0 lbs

Specifications:

- Nominal voltage: 12 V
- Rated capacity: 75 Ah (at C₂₀ and 25 °C)
- CCA (EN): 650 A
- Plate technology: Calcium / Calcium
- Separator: Polyethylene + Polyester
- Electrolyte: Sulphuric acid; analytical grade
- Standards: IEC 60254; IEC 61427
- Case / Lid material: Polypropylene
- Lid type: Kamina
- Terminal type: Top / Automotive
- Carrying Handles: Available
- Cycles at 50% DoD: up to 400 cycles
- PVES applications: up to 800 cycles

Performance characteristics:

BATTERY DISCHARGE PERFORMANCE AT 25°C

Discharge rate	C ₅ (5 h)	C ₂₀ (20 h)	C ₁₀₀ (100 h)	Capacity at 25 A
End of discharge voltage	10.20 V	10.50 V	10.80 V	10.50 V
Discharge capacity	60 Ah	75 Ah	80 Ah	130 min

Temperature correction factor of discharge C₅ (5 h) capacity


Temperature	-10 °C	0 °C	20 °C	25 °C	30 °C	35 °C	40 °C
Correction factor	0.80	0.88	0.98	1.00	1.03	1.05	1.07

BATTERY CHARGE CONDITIONS AT 25°C


Charging profile:

Charge factor: 1.10 – 1.20

I_Ua –characteristics for flooded batteries

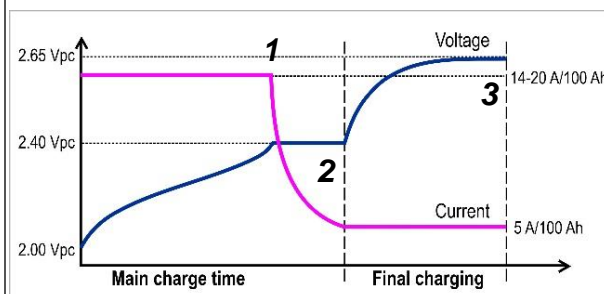

Charging times with I_Ua-characteristics in hours at 25 °C


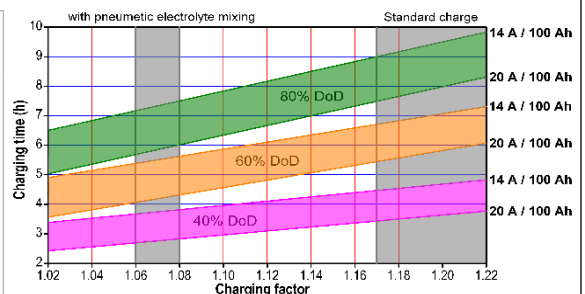


Stage1: Constant current **Stage 2:** Constant voltage **Stage 3:** Constant current

It is mandatory to check the electrolyte level every 3 months and top up with deionized water to the markings.

BATTERY DISCHARGE CURVES AT 25°C

DISCHARGE PERFORMANCE AT CONSTANT CURRENT DISCHARGE (A)

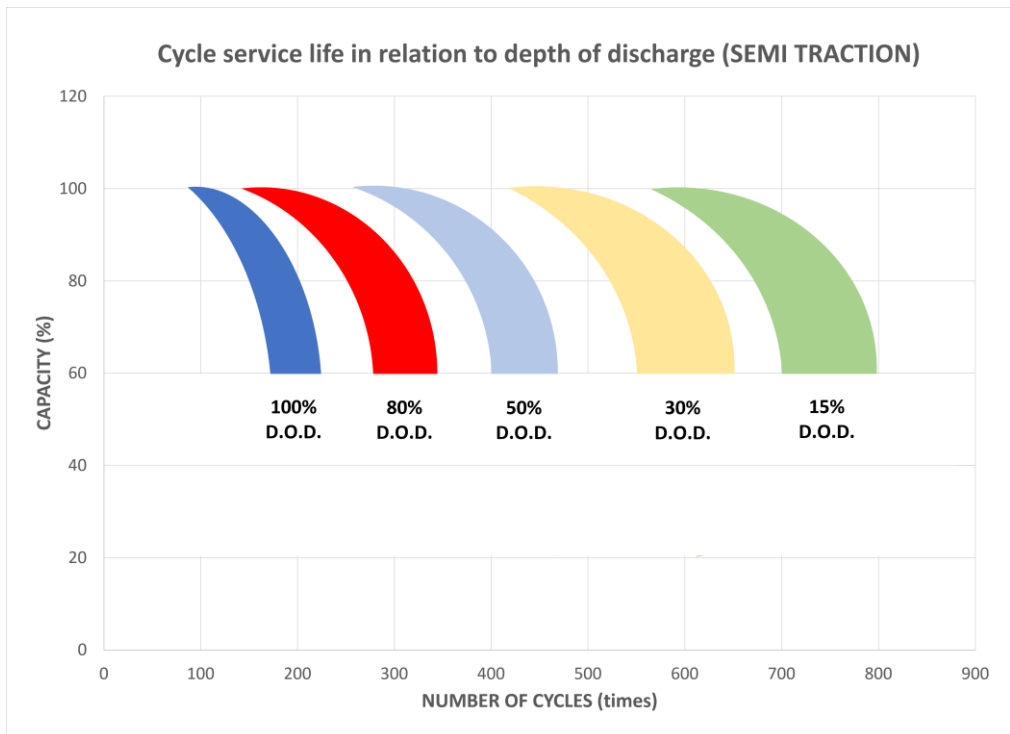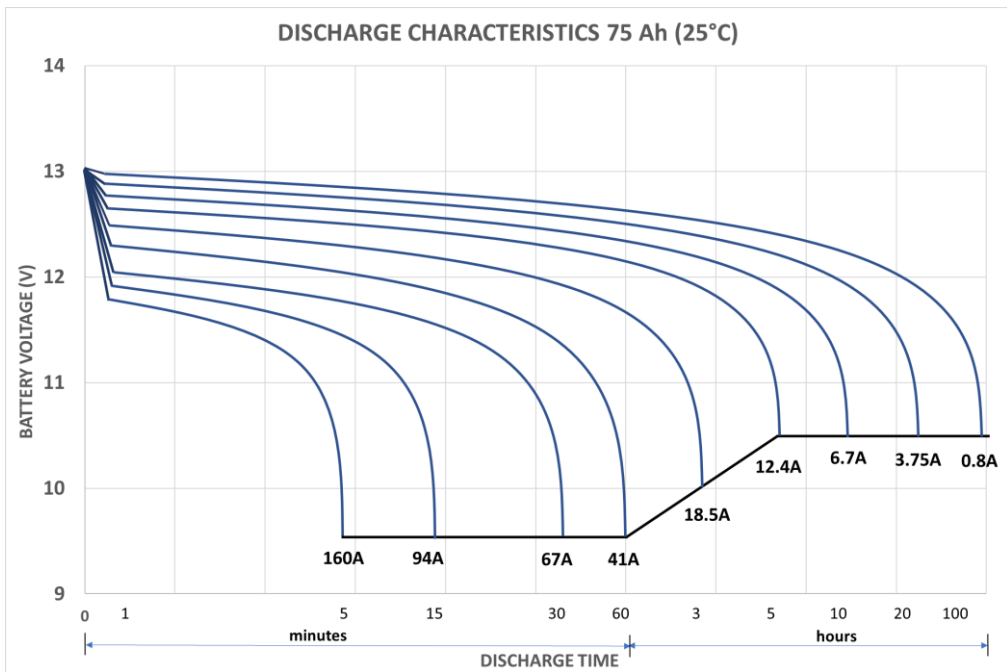

It is mandatory to check the electrolyte level every 3 months and top up with deionized water to the markings.